

# SOUND SOLUTIONS!

Case History No. 2

## INNOVATIVE CURTAIN ENCLOSURE HUSHES GRANULATOR



Curtain enclosure constructed of ANC - BBC-13-2" reduced noise levels by 22dB (A).



Custom feed-flap in open position (Left photo) and closed position (right photo) protects operator during loading.




"O.K., we'll flip for it. Heads I have to do it, tails you have to do it." Sounds like a conversation between two kids arguing over who has to take out the trash. But in actuality, it was the type of conversation that took place for years at a large plastics manufacturer in the Northeast until they called All Noise Control.

Like other manufacturers, this plastics producer has a certain amount of waste inherent in the making of a product. Fortunately, they are able to recycle waste. Waste is loaded into a granulator which grinds the plastic into tiny pellets. Eventually these pellets are reused in a finished product. The problem was that no employee wanted to go near the granulator. It was the loudest machine on the shop floor peaking at 110 dB(A). Finally the noisy granulator became too

Complaints from shop employees became more frequent, waste piled up meaning that potential raw materials were being squandered and the threat of an insurance claim or an OSHA violation grew every day. Something had to be done quickly.

Company management figured that the best way to overcome the problem was with some type of acoustical enclosure, either metal or one constructed from composite materials. A metal enclosure would help reduce noise levels once the granulator was up and running, but the proposed design provided no protection for the operator when loading the machine. Another disadvantage of the metal enclosure is that access to the machinery would have been limited.

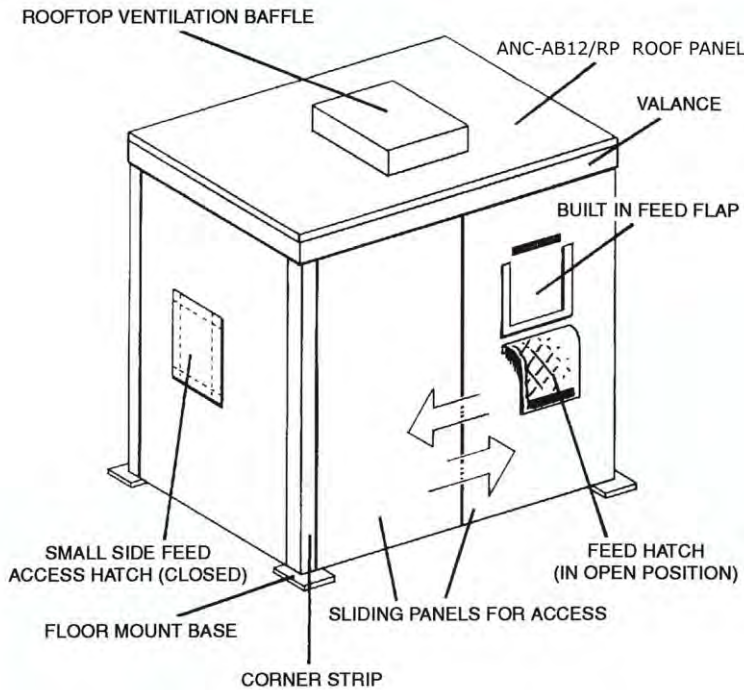

All Noise control applications engineers offered an enclosure design featuring their ANC-BBC-13-2" composite material, a combination sound absorber and noise barrier. The composite is made up of a 1 lb/sq.ft. Reinforced loaded vinyl noise barrier and 2" thick quilted fiberglass sound absorber. Typically, a 1" thick absorber is put on the interior of a reinforced barrier. Because of the extreme conditions in this case, All Noise control utilized the 2" thick material.

The ANC-BBC-13-2" composite gives overall noise protection comparable to the metal enclosure and because of All Noise Control's capabilities, extensive

fabricating the enclosure could be customized to meet every specification of the plastics manufacturer.

A critical design feature that All Noise Control engineers developed was a feed flap that gave the operator a substantial amount of protection when loading the granulator. Prior to the installation of All Noise Control's enclosure, the operator was subjected to 110 dB(A) of noise at close range. Continuous loading of the granulator without hearing protection would have been disastrous. With the new enclosure featuring the feed flap, an operator no longer needs hearing protection.

All Noise Control engineers also overcame the concern the company had about access to the machine. The double curtain track and hardware design allows access at any point in the enclosure. Another key design feature is the ventilation system. Too often, the installation of a roof panel means sacrificing ventilation for enhanced acoustical performance.

The idea of "one-stop shopping" at All Noise Control also appealed to the plastics manufacturer. Many noise control companies only sell the materials which comprise the enclosure. These companies leave it to the customer to find someone who can provide the structural framework for the enclosure and handle the installation. All Noise Control has its own line of free-standing or suspended structural support systems, and an installation team. In fact, this enclosure was installed in just four hours.

Employee response to the enclosure has been tremendous. Loading and running the granulator is no longer the dreaded task it once was. Consequently, waste no longer piles up and materials are quickly recycled.

The granulator is finally the productive machine management always hoped it would be.

Sound Transmission Loss Octave Band Center Frequency (Hz)								
Location	A	125	250	500	1000	2000	4000	8000
BEFORE at Operator	110	96	99	102	104	109	96	90
AFTER at Operator (Feed Hatch closed)	88	90	91	89	83	79	73	70



6801 Lake Worth Rd 323  
 Lake Worth, FL 33467  
 Ph. (561) 964-9360  
 Fax. (561) 964-9359  
 info@allnoisecontrol.com  
 www.allnoisecontrol.com